
2 Way Cassette

ARNU18GTLC2 ARNU24GTLC2



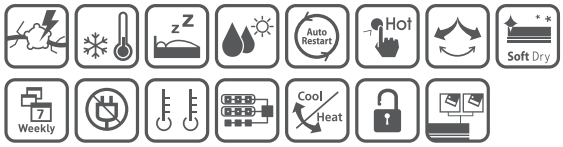

Model				ARNU18GTLC2	ARNU24GTLC2
Capacity	Cooling	Nom	kW	5.6	7.1
	Heating	Nom	kW	6.3	8.0
Power Input	Cooling	Nom	W	70	70
	Heating	Nom	W	70	70
Power Supply			ø/V/Hz	1 / 220 ~240 / 50	1 / 220 ~240 / 50
Airflow Rate	Cooling	H/M/L	m^3/min	13 / 12 / 10	17 / 15 / 13
	Heating	H/M/L	m^3/min	13 / 12 / 10	17 / 15 / 13
Sound Pressure		H/M/L	dBA	40 / 36 / 32	42 / 38 / 34
Dimensions	Body	WxHxD	mm	830 x 550 x 225	830 x 550 x 225
Net Weight			kg(lbs)	22(48.5)	22(48.5)
Piping Connection	Liquid		mm(inch)	6.35(1/4)	9.52(3/8)
	Gas		mm(inch)	12.7(1/2)	15.88(5/8)
	Drain	I.D.	mm(inch)	25(31/32)	25(31/32)
Decoration Panel	Model			PT-HLC	PT-HLC
	Colour			Morning fog	Morning fog
	Dimensions	WxDxH	mm	1,050 x 28 x 640	1,050 x 28 x 640
	Weight		kg	4.0	4.0

Note :

1. Capacities are based on the following conditions

Cooling - Indoor temp. 27°C(80.6°F)DB / 19°C(66.2°F)WB
Outdoor temp. 35°C(95°F)DB / 24°C(75.2°F)WB
Interconnecting piping length 7.5m
Level difference of zero

Heating - Indoor temp. 20°C(68°F)DB / 15°C(59°F)WB
Outdoor temp. 7°C(44.6°F)DB / 6°C(42.8°F)WB
Interconnecting piping length 7.5m
Level difference of zero

2. Due to our policy of innovation some specifications may be changed without notification

Accessories

Model		ARNU18GTLC2	ARNU24GTLC2
Dry Contact	Without Case (1 Contact Point)	PQDSA	
	With Case (1 Contact Point)	PQDSB / PQDSB1	
	With Case (2 Contact Point)	PQDSBC	

Wired Remote Controller					Wireless Remote Controller
Deluxe Type	Standard Type	Standard Type	Simple Type	Simple Type for Hotel	
					
PQRCUDS0(white) PQRCUDS0B(blue) PQRCUDS0S(silver)	PQRCVSL0	PQRCVSL0QW	PQRCVCL0Q (Black) PQRCVCL0QW (white)	PQRCHCA0Q(Black) PQRCHCA0QW(White)	PQWRHQ0FDB